

PA0205S Switching Mode Power Supply

■ Special Features


- Small multi-purpose power supply
- Wide Input Range (AC85V~265V)
- Isolated output
- Short circuit protection
- Over voltage protection
- Thermal shutdown
- Low standby-power




■ Electrical Characteristics

Characteristics		Condition	Min.	Typ.	Max.	Unit
AC Input	Input Voltage Range	$I_o=300\text{mA}$	85	220	265	V
	Current	$V_i=AC220\text{V}$, $I_o=300\text{mA}$	-	-	0.1	A
Output	Output Voltage(DC)	$V_i=AC220$, $I_o=0\sim300\text{mA}$	4.75	5.00	5.25	V
	Output Current	$V_i=AC220$, $V_o=5.0\text{Vdc}$	-	-	300	mA
	Line Regulation	$V_i=AC85\sim265\text{V}$, $I_o=300\text{mA}$	-	-	0.2	V
	Load Regulation	$V_i=AC220\text{V}$, $I_o=0\sim300\text{mA}$	-	-	0.2	V
	Ripple Voltage	$V_i=AC220\text{V}$, $I_o=300\text{mA}$	-	-	0.2	Vp-p
	Efficiency	$V_i=AC220\text{V}$, $I_o=300\text{mA}$	-	63	-	%
Power Consumption	No Load	$V_i=AC220\text{V}$, $I_o=0\text{mA}$	-	-	0.15	W
	Full Load	$V_i=AC220\text{V}$, $I_o=300\text{mA}$	2.25	2.5	2.75	W
Ambient Temperature	Operating Range	$V_i=AC220\text{V}$, $I_o=300\text{mA}$	-10	-	70	°C
	Storage Range		-20	-	105	°C


■ External EMI Filter

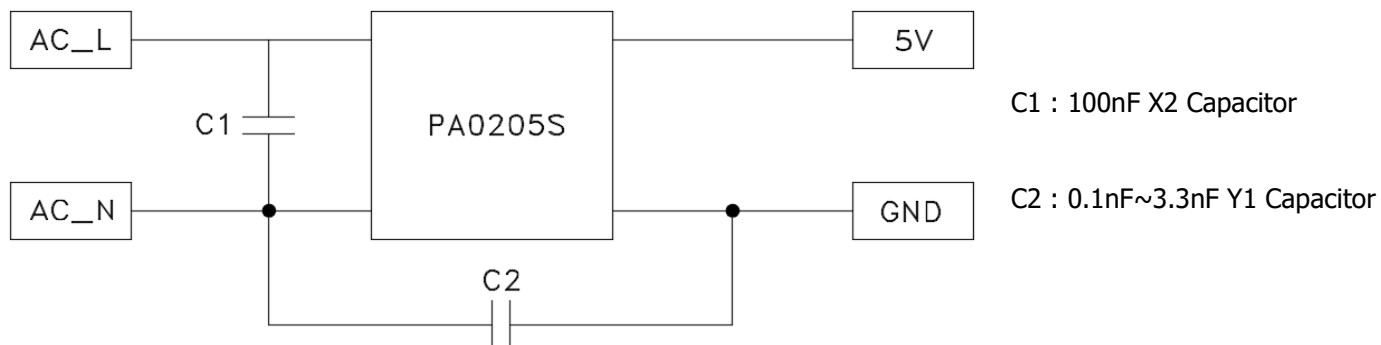

■ Block Diagram

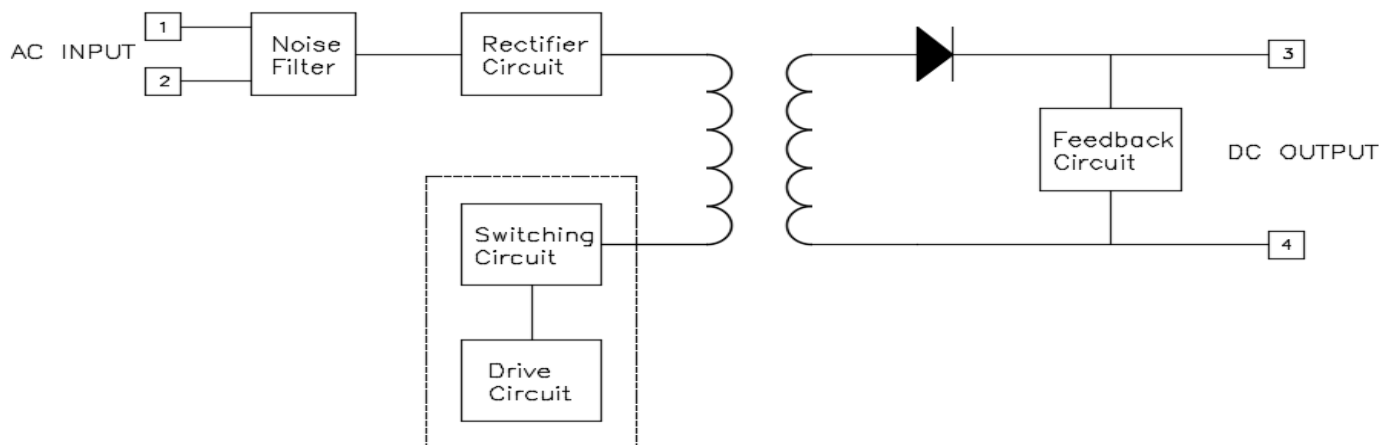

■ Dimension

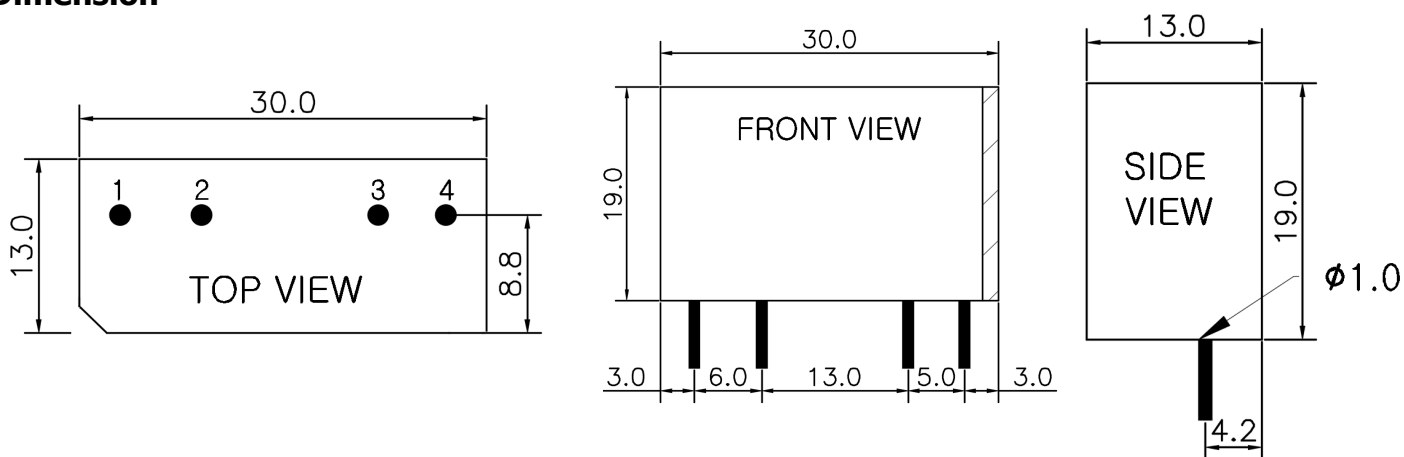


Pin No.	Description
1	AC INPUT (N)
2	AC INPUT (L)
3	DC+ OUTPUT
4	GND

Notes

1.Dimension in mm


■ Packing Specification

1. Inner Box

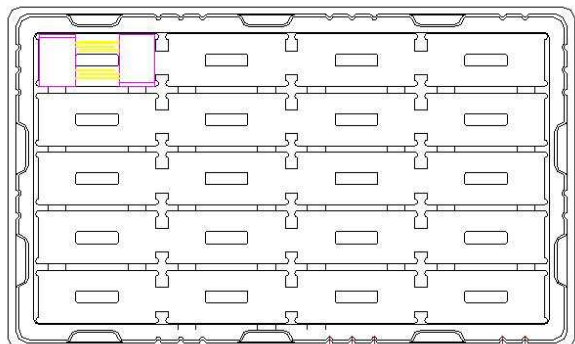

Matter	PET
Quantity	40 pcs (8 X 5)

2. Output Box

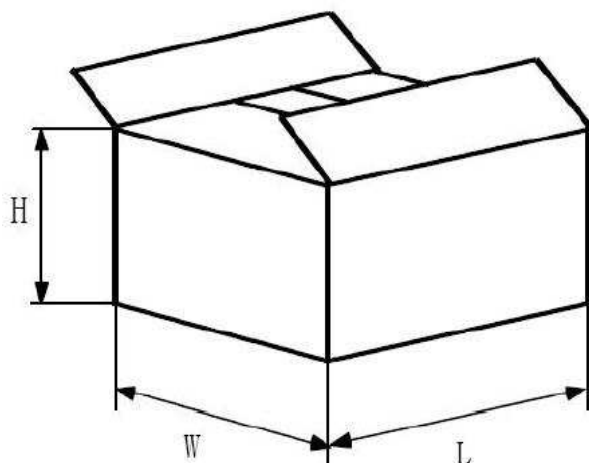

L	460
W	390
H	225
Quantity	1000EA
Marking	1. Maker 2. Part Number 3. Quantity

* Unit : mm